

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
28 August 2003 (28.08.2003)

PCT

(10) International Publication Number
WO 2003/071086 A3

(51) International Patent Classification⁷: E21B 43/10

(21) International Application Number:
PCT/US2003/000609

(22) International Filing Date: 9 January 2003 (09.01.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/357,372 15 February 2002 (15.02.2002) US

(71) Applicant (for all designated States except US): ENVEN-
TURE GLOBAL TECHNOLOGY [US/US]: 16200 A
Park Row, Houston, TX 77084 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): COOK, Robert,

Lance [US/US]: 934 Caswell Court, Katy, TX 77450 (US).
RING, Lev [RU/US]: 14126 Heatherhill Place, Houston,
TX 77077 (US). DEAN, William, J. [US/US]: 22602
Crescent Cove Court, Katy, TX 77494 (US). WADDELL,
Kevin, K. [US/US]: 11007 Sprucedale Court, Houston,
TX 77070 (US).

(74) Agents: MATTINGLY, Todd et al.: Haynes and Boone,
LLP, Suite 4300, 1000 Louisiana Street, Houston, TX
77002-5012 (US).


(81) Designated States (national): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SK, SL,
TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(84) Designated States (regional): ARIPO patent (GI, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),

[Continued on next page]

(54) Title: MONO-DIAMETER WELLBORE CASING

(57) Abstract: A mono-diameter wellbore casing.

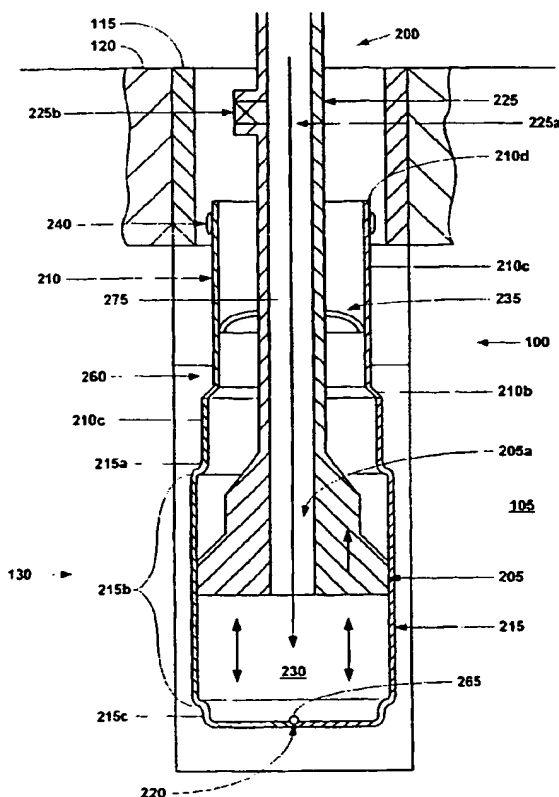

BEST AVAILABLE COPY

WO 2003/071086 A3



Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, SE, SI,
SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN,
GQ, GW, ML, MR, NE, SN, TD, TG).

Declaration under Rule 4.17:

— *of inventorship (Rule 4.17(iv)) for US only*

Published:

— *with international search report*

— *before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments*

(88) Date of publication of the international search report:

22 July 2004

*For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.*

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US03/00609

A. CLASSIFICATION OF SUBJECT MATTER

IPC(7) : E21B 43/10

US CL : 166/380, 207

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 166/380, 207, 212, 216, 217

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2002/0033261 A1 (METCALFE) 21 March 2002 (21.03.02), summary.	1-55
A	US 6,085,838 A (VERCAEMER et al.) 11 July 2000 (11.07.02), figures 5-7.	1-55

☐ Further documents are listed in the continuation of Box C.

☐ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T"

later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X"

document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y"

document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&"

document member of the same patent family

Date of the actual completion of the international search

15 April 2003 (15.04.2003)

Date of mailing of the international search report

20 MAY 2004

Name and mailing address of the ISA/US

Commissioner of Patents and Trademarks

Box PCT

Washington, D.C. 20231

Facsimile No. (703)305-3230

Authorized officer

David Bagner

Telephone No. (703) 308-1113

**(19) World Intellectual Property
Organization
International Bureau**



1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139 140 141 142 143 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159 160 161 162 163 164 165 166 167 168 169 170 171 172 173 174 175 176 177 178 179 180 181 182 183 184 185 186 187 188 189 190 191 192 193 194 195 196 197 198 199 200 201 202 203 204 205 206 207 208 209 210 211 212 213 214 215 216 217 218 219 220 221 222 223 224 225 226 227 228 229 230 231 232 233 234 235 236 237 238 239 240 241 242 243 244 245 246 247 248 249 250 251 252 253 254 255 256 257 258 259 260 261 262 263 264 265 266 267 268 269 270 271 272 273 274 275 276 277 278 279 280 281 282 283 284 285 286 287 288 289 290 291 292 293 294 295 296 297 298 299 300 301 302 303 304 305 306 307 308 309 310 311 312 313 314 315 316 317 318 319 320 321 322 323 324 325 326 327 328 329 330 331 332 333 334 335 336 337 338 339 340 341 342 343 344 345 346 347 348 349 350 351 352 353 354 355 356 357 358 359 360 361 362 363 364 365 366 367 368 369 370 371 372 373 374 375 376 377 378 379 380 381 382 383 384 385 386 387 388 389 390 391 392 393 394 395 396 397 398 399 400 401 402 403 404 405 406 407 408 409 410 411 412 413 414 415 416 417 418 419 420 421 422 423 424 425 426 427 428 429 430 431 432 433 434 435 436 437 438 439 440 441 442 443 444 445 446 447 448 449 450 451 452 453 454 455 456 457 458 459 460 461 462 463 464 465 466 467 468 469 470 471 472 473 474 475 476 477 478 479 480 481 482 483 484 485 486 487 488 489 490 491 492 493 494 495 496 497 498 499 500 501 502 503 504 505 506 507 508 509 510 511 512 513 514 515 516 517 518 519 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 554 555 556 557 558 559 560 561 562 563 564 565 566 567 568 569 570 571 572 573 574 575 576 577 578 579 580 581 582 583 584 585 586 587 588 589 590 591 592 593 594 595 596 597 598 599 600 601 602 603 604 605 606 607 608 609 610 611 612 613 614 615 616 617 618 619 620 621 622 623 624 625 626 627 628 629 630 631 632 633 634 635 636 637 638 639 640 641 642 643 644 645 646 647 648 649 650 651 652 653 654 655 656 657 658 659 660 661 662 663 664 665 666 667 668 669 670 671 672 673 674 675 676 677 678 679 680 681 682 683 684 685 686 687 688 689 690 691 692 693 694 695 696 697 698 699 700 701 702 703 704 705 706 707 708 709 710 711 712 713 714 715 716 717 718 719 720 721 722 723 724 725 726 727 728 729 730 731 732 733 734 735 736 737 738 739 740 741 742 743 744 745 746 747 748 749 750 751 752 753 754 755 756 757 758 759 760 761 762 763 764 765 766 767 768 769 770 771 772 773 774 775 776 777 778 779 780 781 782 783 784 785 786 787 788 789 790 791 792 793 794 795 796 797 798 799 800 801 802 803 804 805 806 807 808 809 810 811 812 813 814 815 816 817 818 819 820 821 822 823 824 825 826 827 828 829 830 831 832 833 834 835 836 837 838 839 840 841 842 843 844 845 846 847 848 849 850 851 852 853 854 855 856 857 858 859 860 861 862 863 864 865 866 867 868 869 870 871 872 873 874 875 876 877 878 879 880 881 882 883 884 885 886 887 888 889 890 891 892 893 894 895 896 897 898 899 900 901 902 903 904 905 906 907 908 909 910 911 912 913 914 915 916 917 918 919 920 921 922 923 924 925 926 927 928 929 930 931 932 933 934 935 936 937 938 939 940 941 942 943 944 945 946 947 948 949 950 951 952 953 954 955 956 957 958 959 960 961 962 963 964 965 966 967 968 969 970 971 972 973 974 975 976 977 978 979 980 981 982 983 984 985 986 987 988 989 990 991 992 993 994 995 996 997 998 999 1000 1001 1002 1003 1004 1005 1006 1007 1008 1009 1010 1011 1012 1013 1014 1015 1016 1017 1018 1019 1020 1021 1022 1023 1024 1025 1026 1027 1028 1029 1030 1031 1032 1033 1034 1035 1036 1037 1038 1039 1040 1

(43) International Publication Date
28 August 2003 (28.08.2003)

PCT

(10) International Publication Number
WO 2003/071086 A3

(51) International Patent Classification⁷: **E21B 43/10**

(21) International Application Number:
PCT/US2003/000609

(22) International Filing Date: 9 January 2003 (09.01.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/357,372 15 February 2002 (15.02.2002) US

(71) Applicant (for all designated States except US): ENVENTURE GLOBAL TECHNOLOGY [US/US]; 16200 A Park Row, Houston, TX 77084 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **COOK, Robert,**

Lance [US/US]; 934 Caswell Court, Katy, TX 77450 (US). RING, Lev [RU/US]; 14126 Hamberhill Place, Houston, TX 77077 (US). DEAN, William, J. [US/US]; 22602 Crescent Cove Court, Katy, TX 77494 (US). WADDELL, Kevin, K. [US/US]; 11007 Sprucedale Court, Houston, TX 77070 (US).

(74) Agents: MATTINGLY, Todd et al.; Haynes and Boone, LLP, Suite 4300, 1000 Louisiana Street, Houston, TX 77002-5012 (US).


(81) **Designated States (national):** AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, ~~KR~~, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, ~~MA~~, MD, MG, MK, MN, MW, MX, MY, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, ~~UZ~~, VN, YU, ZA, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),

[Continued on next page.]

(54) Title: MONO-DIAMETER WELLBORE CASING

(57) **Abstract:** A mono-diameter wellbore casing.

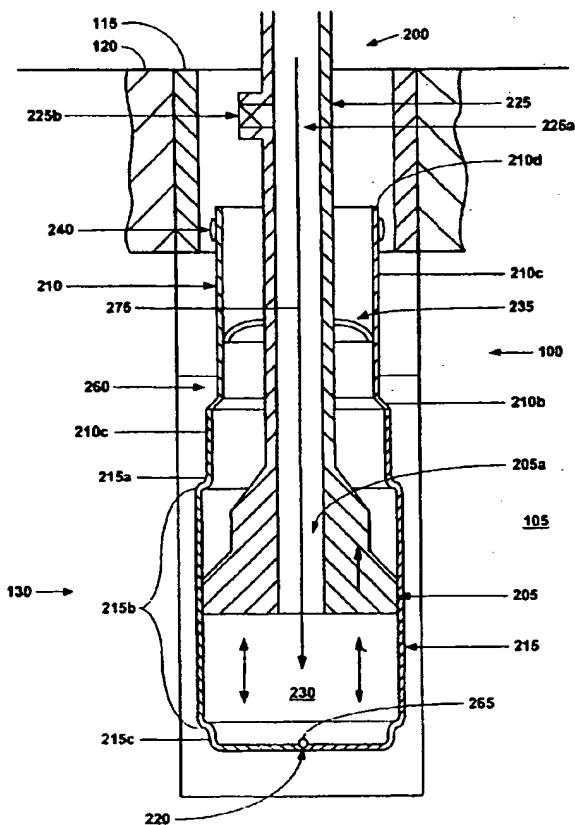

WO 2003/071086 A3



Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, SE, SI,
SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN,
GQ, GW, ML, MR, NE, SN, TD, TG).

— with amended claims

(88) Date of publication of the international search report:
22 July 2004

Declaration under Rule 4.17:

— of inventorship (Rule 4.17(iv)) for US only

Date of publication of the amended claims: 14 October 2004

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

AMENDED CLAIMS

**[Received by the International Bureau on 15 July 2004 (15.07.04):
original claims 1 - 55 amended;
new claims 56 - 78 added (2 pages)]**

Claims

1. An apparatus for forming a wellbore casing in a borehole located in a subterranean formation including a preexisting wellbore casing, comprising:
 - a support member including a first fluid passage;
 - an expansion cone coupled to the support member including a second fluid passage fluidly coupled to the first fluid passage;
 - an expandable tubular liner movably coupled to the expansion cone; and
 - an expandable shoe coupled to the expandable tubular liner;
 - wherein the expansion cone is adjustable to a plurality of stationary positions.
2. The apparatus of claim 1, wherein the expandable shoe includes a valveable fluid passage for controlling the flow of fluidic materials out of the expandable shoe.
3. The apparatus of claim 1, wherein the expandable shoe includes:
 - an expandable portion; and
 - a remaining portion coupled to the expandable portion;
 - wherein the outer circumference of the expandable portion is greater than the outer circumference of the remaining portion.
4. The apparatus of claim 3, wherein the expandable portion includes:
 - one or more inward folds.
5. The apparatus of claim 3, wherein the expandable portion includes:
 - one or more corrugations.
6. The apparatus of claim 1, wherein the expandable shoe includes:
 - one or more inward folds.
7. The apparatus of claim 1, wherein the expandable shoe includes:
 - one or more corrugations.
8. A method of forming a wellbore casing in a subterranean formation having a preexisting wellbore casing positioned in a borehole, comprising:

installing a tubular liner, an adjustable expansion cone, and a shoe in the borehole;
radially expanding at least a portion of the shoe by a process comprising:
adjusting the adjustable expansion cone to a first outside diameter, and
injecting a fluidic material into the shoe; and
radially expanding at least a portion of the tubular liner by a process comprising:
adjusting the adjustable expansion cone to a second outside diameter, and
injecting a fluidic material into the borehole below the expansion cone.

9. The method of claim 8, wherein the first outside diameter of the adjustable expansion cone is greater than the second outside diameter of the adjustable expansion cone.

10. The method of claim 8, wherein radially expanding at least a portion of the shoe further comprises:
lowering the adjustable expansion cone into the shoe; and
adjusting the adjustable expansion cone to the first outside diameter.

11. The method of claim 8, wherein radially expanding at least a portion of the shoe further comprises:
pressurizing a region within the shoe below the adjustable expansion cone using a fluidic material; and
pressurizing an annular region above the adjustable expansion cone using the fluidic material.

12. The method of claim 8, wherein radially expanding at least a portion of the tubular liner further comprises:
pressurizing a region within the shoe below the adjustable expansion cone using a fluidic material; and
pressurizing an annular region above the adjustable expansion cone using the fluidic material.

13. A system for forming a wellbore casing in a subterranean formation having a preexisting wellbore casing positioned in a borehole, comprising:
means for installing a tubular liner, an adjustable expansion cone, and a shoe in the borehole;

means for radially expanding at least a portion of the shoe comprising:
means for adjusting the adjustable expansion cone to a first outside diameter; and
means for injecting a fluidic material into the shoe; and
means for radially expanding at least a portion of the tubular liner comprising:
means for adjusting the adjustable expansion cone to a second outside diameter;
and
means for injecting a fluidic material into the borehole below the adjustable
expansion cone.

14. The system of claim 13, wherein the first outside diameter of the adjustable expansion cone is greater than the second outside diameter of the adjustable expansion cone.

15. The system of claim 13, wherein the means for radially expanding at least a portion of the shoe further comprises:

means for lowering the adjustable expansion cone into the shoe; and
means for adjusting the adjustable expansion cone to the first outside diameter.

16. The system of claim 13, wherein the means for radially expanding at least a portion of the shoe further comprises:

means for pressurizing a region within the shoe below the adjustable expansion cone using a fluidic material; and
means for pressurizing an annular region above the adjustable expansion cone using the fluidic material.

17. The system of claim 13, wherein the means for radially expanding at least a portion of the tubular liner further comprises:

means for pressurizing a region within the shoe below the adjustable expansion cone using a fluidic material; and
means for pressurizing an annular region above the adjustable expansion cone using the fluidic material.

18. A wellbore casing positioned in a borehole within a subterranean formation, comprising:

- a first wellbore casing comprising:
an upper portion of the first wellbore casing; and
a lower portion of the first wellbore casing coupled to the upper portion of the first wellbore casing;
wherein the inside diameter of the upper portion of the first wellbore casing is less than the inside diameter of the lower portion of the first wellbore casing; and
a second wellbore casing comprising:
an upper portion of the second wellbore casing that overlaps with and is coupled to the lower portion of the first wellbore casing; and
a lower portion of the second wellbore casing coupled to the upper portion of the second wellbore casing;
wherein the inside diameter of the upper portion of the second wellbore casing is less than the inside diameter of the lower portion of the second wellbore casing;
and
wherein the inside diameter of the upper portion of the first wellbore casing is equal to the inside diameter of the upper portion of the second wellbore casing;
wherein the second wellbore casing is coupled to the first wellbore casing by the process of:
installing the second wellbore casing and an adjustable expansion cone within the borehole;
radially expanding at least a portion of the lower portion of the second wellbore casing by a process comprising:
adjusting the adjustable expansion cone to a first outside diameter; and
injecting a fluidic material into the second wellbore casing; and
radially expanding at least a portion of the upper portion of the second wellbore casing by a process comprising:
adjusting the adjustable expansion cone to a second outside diameter; and
injecting a fluidic material into the borehole below the adjustable expansion cone.
19. The wellbore casing of claim 18, wherein the first outside diameter of the adjustable expansion cone is greater than the second outside diameter of the adjustable expansion cone.

20. The wellbore casing of claim 18, wherein radially expanding at least a portion of the lower portion of the second wellbore casing further comprises:
lowering the adjustable expansion cone into the lower portion of the second wellbore casing; and
adjusting the adjustable expansion cone to the first outside diameter.
21. The wellbore casing of claim 18, wherein radially expanding at least a portion of the lower portion of the second wellbore casing further comprises:
pressurizing a region within the lower portion of the second wellbore casing below the adjustable expansion cone using a fluidic material; and
pressurizing an annular region above the adjustable expansion cone using the fluidic material.
22. The wellbore casing of claim 18, wherein radially expanding at least a portion of the upper portion of the second wellbore casing further comprises:
pressurizing a region within the lower portion of the second wellbore casing below the adjustable expansion cone using a fluidic material; and
pressurizing an annular region above the adjustable expansion cone using the fluidic material.
23. An apparatus for forming a wellbore casing in a borehole located in a subterranean formation including a preexisting wellbore casing, comprising:
a support member including a first fluid passage;
a first adjustable expansion cone coupled to the support member including a second fluid passage fluidically coupled to the first fluid passage;
a second adjustable expansion cone coupled to the support member including a third fluid passage fluidically coupled to the first fluid passage;
an expandable tubular liner movably coupled to the first and second adjustable expansion cones; and
an expandable shoe coupled to the expandable tubular liner.
24. The apparatus of claim 23, wherein the expandable shoe includes a valveable fluid passage for controlling the flow of fluidic materials out of the expandable shoe.

25. The apparatus of claim 23, wherein the expandable shoe includes:
an expandable portion; and
a remaining portion coupled to the expandable portion;
wherein the outer circumference of the expandable portion is greater than the outer
circumference of the remaining portion.
26. The apparatus of claim 25, wherein the expandable portion includes:
one or more inward folds.
27. The apparatus of claim 25, wherein the expandable portion includes:
one or more corrugations.
28. The apparatus of claim 23, wherein the expandable shoe includes:
one or more inward folds.
29. The apparatus of claim 23, wherein the expandable shoe includes:
one or more corrugations.
30. A method of forming a wellbore casing in a subterranean formation having a
preexisting wellbore casing positioned in a borehole, comprising:
installing a tubular liner, an upper adjustable expansion cone, a lower adjustable
expansion cone, and a shoe in the borehole;
radially expanding at least a portion of the shoe by a process comprising:
adjusting the lower adjustable expansion cone to an increased outside diameter; and
injecting a fluidic material into the shoe; and
radially expanding at least a portion of the tubular liner by a process comprising:
adjusting the lower adjustable expansion cone to a reduced outside diameter;
adjusting the upper adjustable expansion cone to an increased outside diameter; and
injecting a fluidic material into the borehole below the lower adjustable expansion
cone.
31. The method of claim 30, wherein the increased outside diameter of the lower
adjustable expansion cone is greater than the increased outside diameter of the upper
adjustable expansion cone.

32. The method of claim 30, wherein the reduced outside diameter of the lower adjustable expansion cone is less than or equal to the increased outside diameter of the upper adjustable expansion cone.
33. The method of claim 30, wherein radially expanding at least a portion of the shoe further comprises:
lowering the lower adjustable expansion cone into the shoe; and
adjusting the lower adjustable expansion cone to the increased outside diameter.
34. The method of claim 30, wherein radially expanding at least a portion of the shoe further comprises:
pressurizing a region within the shoe below the lower adjustable expansion cone using a fluidic material; and
pressurizing an annular region above the upper adjustable expansion cone using the fluidic material.
35. The method of claim 30, wherein radially expanding at least a portion of the tubular liner further comprises:
pressurizing a region within the shoe below the lower adjustable expansion cone using a fluidic material; and
pressurizing an annular region above the upper adjustable expansion cone using the fluidic material.
36. A system for forming a wellbore casing in a subterranean formation having a preexisting wellbore casing positioned in a borehole, comprising:
means for installing a tubular liner, an upper adjustable expansion cone, a lower adjustable expansion cone, and a shoe in the borehole;
means for radially expanding at least a portion of the shoe comprising:
means for adjusting the lower adjustable expansion cone to an increased outside diameter; and
means for injecting a fluidic material into the shoe; and
means for radially expanding at least a portion of the tubular liner comprising:

means for adjusting the lower adjustable expansion cone to a reduced outside diameter;

means for adjusting the upper adjustable expansion cone to an increased outside diameter; and

means for injecting a fluidic material into the borehole below the lower adjustable expansion cone.

37. The system of claim 36, wherein the increased outside diameter of the lower adjustable expansion cone is greater than the increased outside diameter of the upper adjustable expansion cone.

38. The system of claim 36, wherein the reduced outside diameter of the lower adjustable expansion cone is less than or equal to the increased outside diameter of the upper adjustable expansion cone.

39. The system of claim 36, wherein the means for radially expanding at least a portion of the shoe further comprises:

means for lowering the lower adjustable expansion cone into the shoe; and

means for adjusting the lower adjustable expansion cone to the increased outside diameter.

40. The system of claim 36, wherein the means for radially expanding at least a portion of the shoe further comprises:

means for pressurizing a region within the shoe below the lower adjustable expansion cone using a fluidic material; and

means for pressurizing an annular region above the upper adjustable expansion cone using the fluidic material.

41. The system of claim 36, wherein the means for radially expanding at least a portion of the tubular liner further comprises:

means for pressurizing a region within the shoe below the lower adjustable expansion cone using a fluidic material; and

means for pressurizing an annular region above the upper adjustable expansion cone using the fluidic material.

42. A wellbore casing positioned in a borehole within a subterranean formation, comprising:
- a first wellbore casing comprising:
 - an upper portion of the first wellbore casing; and
 - a lower portion of the first wellbore casing coupled to the upper portion of the first wellbore casing;
 - wherein the inside diameter of the upper portion of the first wellbore casing is less than the inside diameter of the lower portion of the first wellbore casing; and
 - a second wellbore casing comprising:
 - an upper portion of the second wellbore casing that overlaps with and is coupled to the lower portion of the first wellbore casing; and
 - a lower portion of the second wellbore casing coupled to the upper portion of the second wellbore casing;
 - wherein the inside diameter of the upper portion of the second wellbore casing is less than the inside diameter of the lower portion of the second wellbore casing;
 - and
 - wherein the inside diameter of the upper portion of the first wellbore casing is equal to the inside diameter of the upper portion of the second wellbore casing;
 - wherein the second wellbore casing is coupled to the first wellbore casing by the process of:
 - installing the second wellbore casing, an upper adjustable expansion cone, a lower adjustable expansion cone, and a shoe in the borehole;
 - radially expanding at least a portion of the lower portion of the second wellbore casing shoe by a process comprising:
 - adjusting the lower adjustable expansion cone to an increased outside diameter; and
 - injecting a fluidic material into the lower portion of the second wellbore casing; and
 - radially expanding at least a portion of the upper portion of the second wellbore casing by a process comprising:
 - adjusting the lower adjustable expansion cone to a reduced outside diameter;
 - adjusting the upper adjustable expansion cone to an increased outside diameter; and
 - injecting a fluidic material into the borehole below the lower adjustable expansion cone.

43. The wellbore casing of claim 42, wherein the increased outside diameter of the lower adjustable expansion cone is greater than the increased outside diameter of the upper adjustable expansion cone.
44. The wellbore casing of claim 42, wherein the reduced outside diameter of the lower adjustable expansion cone is less than or equal to the increased outside diameter of the upper adjustable expansion cone.
45. The wellbore casing of claim 42, wherein radially expanding at least a portion of the lower portion of the second wellbore casing further comprises:
lowering the lower adjustable expansion cone into the lower portion of the second wellbore casing; and
adjusting the lower adjustable expansion cone to the increased outside diameter.
46. The wellbore casing of claim 42, wherein radially expanding at least a portion of the lower portion of the second wellbore casing further comprises:
pressurizing a region within the lower portion of the second wellbore casing below the lower adjustable expansion cone using a fluidic material; and
pressurizing an annular region above the upper adjustable expansion cone using the fluidic material.
47. The wellbore casing of claim 42, wherein radially expanding at least a portion of the upper portion of the second wellbore casing further comprises:
pressurizing a region within the lower portion of the second wellbore casing below the lower adjustable expansion cone using a fluidic material; and
pressurizing an annular region above the upper adjustable expansion cone using the fluidic material.
48. An apparatus for forming a wellbore casing in a borehole located in a subterranean formation including a preexisting wellbore casing, comprising:
a support member including a first fluid passage;
an expansion cone coupled to the support member including a second fluid passage fluidically coupled to the first fluid passage;
an expandable tubular liner movably coupled to the expansion cone; and

an expandable shoe coupled to the expandable tubular liner comprising:
a valveable fluid passage for controlling the flow of fluidic materials out of the expandable shoe;
an expandable portion comprising one or more inward folds; and
a remaining portion coupled to the expandable portion;
wherein the outer circumference of the expandable portion is greater than the outer circumference of the remaining portion;
wherein the expansion cone is adjustable to a plurality of stationary positions.

49. A method of forming a wellbore casing in a subterranean formation having a preexisting wellbore casing positioned in a borehole, comprising:
installing a tubular liner, an adjustable expansion cone, and a shoe in the borehole;
radially expanding at least a portion of the shoe by a process comprising:
lowering the adjustable expansion cone into the shoe;
adjusting the adjustable expansion cone to a first outside diameter;
pressurizing a region within the shoe below the adjustable expansion cone using a fluidic material; and
pressurizing an annular region above the adjustable expansion cone using the fluidic material; and
radially expanding at least a portion of the tubular liner by a process comprising:
adjusting the adjustable expansion cone to a second outside diameter;
pressurizing a region within the shoe below the adjustable expansion cone using a fluidic material; and
pressurizing an annular region above the adjustable expansion cone using the fluidic material;
wherein the first outside diameter of the adjustable expansion cone is greater than the second outside diameter of the adjustable expansion cone.
50. A system for forming a wellbore casing in a subterranean formation having a preexisting wellbore casing positioned in a borehole, comprising:
means for installing a tubular liner, an adjustable expansion cone, and a shoe in the borehole;
means for radially expanding at least a portion of the shoe comprising:
means for lowering the adjustable expansion cone into the shoe;

means for adjusting the adjustable expansion cone to a first outside diameter;
means for pressurizing a region within the shoe below the adjustable expansion cone using a fluidic material; and
means for pressurizing an annular region above the adjustable expansion cone using the fluidic material; and
means for radially expanding at least a portion of the tubular liner comprising:
means for adjusting the adjustable expansion cone to a second outside diameter;
means for pressurizing a region within the shoe below the adjustable expansion cone using a fluidic material; and
means for pressurizing an annular region above the adjustable expansion cone using the fluidic material;
wherein the first outside diameter of the adjustable expansion cone is greater than the second outside diameter of the adjustable expansion cone.

51. A wellbore casing positioned in a borehole within a subterranean formation, comprising:

a first wellbore casing comprising:

an upper portion of the first wellbore casing; and

a lower portion of the first wellbore casing coupled to the upper portion of the first wellbore casing;

wherein the inside diameter of the upper portion of the first wellbore casing is less than the inside diameter of the lower portion of the first wellbore casing; and

a second wellbore casing comprising:

an upper portion of the second wellbore casing that overlaps with and is coupled to the lower portion of the first wellbore casing; and

a lower portion of the second wellbore casing coupled to the upper portion of the second wellbore casing;

wherein the inside diameter of the upper portion of the second wellbore casing is less than the inside diameter of the lower portion of the second wellbore casing;

and

wherein the inside diameter of the upper portion of the first wellbore casing is equal to the inside diameter of the upper portion of the second wellbore casing;

wherein the second wellbore casing is coupled to the first wellbore casing by the process of:

installing the second wellbore casing and an adjustable expansion cone in the borehole;
radially expanding at least a portion of the lower portion of the second wellbore casing by a process comprising:
lowering the adjustable expansion cone into the lower portion of the second wellbore casing;
adjusting the adjustable expansion cone to a first outside diameter;
pressurizing a region within the lower portion of the second wellbore casing below the adjustable expansion cone using a fluidic material; and
pressurizing an annular region above the adjustable expansion cone using the fluidic material; and
radially expanding at least a portion of the upper portion of the second wellbore casing by a process comprising:
adjusting the adjustable expansion cone to a second outside diameter;
pressurizing a region within the shoe below the adjustable expansion cone using a fluidic material; and
pressurizing an annular region above the adjustable expansion cone using the fluidic material;
wherein the first outside diameter of the adjustable expansion cone is greater than the second outside diameter of the adjustable expansion cone.

52. An apparatus for forming a wellbore casing in a borehole located in a subterranean formation including a preexisting wellbore casing, comprising:
- a support member including a first fluid passage;
 - a first adjustable expansion cone coupled to the support member including a second fluid passage fluidically coupled to the first fluid passage;
 - a second adjustable expansion cone coupled to the support member including a third fluid passage fluidically coupled to the first fluid passage;
 - an expandable tubular liner movably coupled to the first and second adjustable expansion cones; and
 - an expandable shoe coupled to the expandable tubular liner comprising:
 - a valveable fluid passage for controlling the flow of fluidic materials out of the expandable shoe;
 - an expandable portion comprising one or more inwards folds; and

a remaining portion coupled to the expandable portion;
wherein the outer circumference of the expandable portion is greater than the outer circumference of the remaining portion.

53. A method of forming a wellbore casing in a subterranean formation having a preexisting wellbore casing positioned in a borehole, comprising:
- installing a tubular liner, an upper adjustable expansion cone, a lower adjustable expansion cone, and a shoe in the borehole;
 - radially expanding at least a portion of the shoe by a process comprising:
 - lowering the lower adjustable expansion cone into the shoe;
 - adjusting the lower adjustable expansion cone to an increased outside diameter;
 - pressurizing a region within the shoe below the lower adjustable expansion cone using a fluidic material; and
 - pressurizing an annular region above the upper adjustable expansion cone using the fluidic material; and
 - radially expanding at least a portion of the tubular liner by a process comprising:
 - adjusting the lower adjustable expansion cone to a reduced outside diameter;
 - adjusting the upper adjustable expansion cone to an increased outside diameter;
 - pressurizing a region within the shoe below the lower adjustable expansion cone using a fluidic material; and
 - pressurizing an annular region above the upper adjustable expansion cone using the fluidic material;
 - wherein the increased outside diameter of the lower adjustable expansion cone is greater than the increased outside diameter of the upper adjustable expansion cone; and
 - wherein the reduced outside diameter of the lower adjustable expansion cone is less than or equal to the increased outside diameter of the upper adjustable expansion cone.

54. A system for forming a wellbore casing in a subterranean formation having a preexisting wellbore casing positioned in a borehole, comprising:
- means for installing a tubular liner, an upper adjustable expansion cone, a lower adjustable expansion cone, and a shoe in the borehole;
 - means for radially expanding at least a portion of the shoe comprising:

means for lowering the lower adjustable expansion cone into the shoe;
means for adjusting the lower adjustable expansion cone to an increased outside diameter;
means for pressurizing a region within the shoe below the lower adjustable expansion cone using a fluidic material; and
means for pressurizing an annular region above the upper adjustable expansion cone using the fluidic material; and
means for radially expanding at least a portion of the tubular liner comprising:
means for adjusting the lower adjustable expansion cone to a reduced outside diameter;
means for adjusting the upper adjustable expansion cone to an increased outside diameter;
means for pressurizing a region within the shoe below the lower adjustable expansion cone using a fluidic material; and
means for pressurizing an annular region above the upper adjustable expansion cone using the fluidic material;
wherein the increased outside diameter of the lower adjustable expansion cone is greater than the increased outside diameter of the upper adjustable expansion cone; and
wherein the reduced outside diameter of the lower adjustable expansion cone is less than or equal to the increased outside diameter of the upper adjustable expansion cone.

55. A wellbore casing positioned in a borehole within a subterranean formation, comprising:

a first wellbore casing comprising:

an upper portion of the first wellbore casing; and

a lower portion of the first wellbore casing coupled to the upper portion of the first wellbore casing;

wherein the inside diameter of the upper portion of the first wellbore casing is less than the inside diameter of the lower portion of the first wellbore casing; and

a second wellbore casing comprising:

an upper portion of the second wellbore casing that overlaps with and is coupled to the lower portion of the first wellbore casing; and

a lower portion of the second wellbore casing coupled to the upper portion of the second wellbore casing;

wherein the inside diameter of the upper portion of the second wellbore casing is less than the inside diameter of the lower portion of the second wellbore casing;

and

wherein the inside diameter of the upper portion of the first wellbore casing is equal to the inside diameter of the upper portion of the second wellbore casing;

wherein the second wellbore casing is coupled to the first wellbore casing by the process of:

- installing the second wellbore casing, an upper adjustable expansion cone, and a lower adjustable expansion cone in the borehole;
- radially expanding at least a portion of the shoe by a process comprising:
 - lowering the lower adjustable expansion cone into the lower portion of the second wellbore casing;
 - adjusting the lower adjustable expansion cone to an increased outside diameter;
 - pressurizing a region within the lower portion of the second wellbore casing below the lower adjustable expansion cone using a fluidic material; and
 - pressurizing an annular region above the upper adjustable expansion cone using the fluidic material; and
- radially expanding at least a portion of the upper portion of the second wellbore casing by a process comprising:
 - adjusting the lower adjustable expansion cone to a reduced outside diameter;
 - adjusting the upper adjustable expansion cone to an increased outside diameter;
 - pressurizing a region within the lower portion of the second wellbore casing below the lower adjustable expansion cone using a fluidic material; and
 - pressurizing an annular region above the upper adjustable expansion cone using the fluidic material;

wherein the increased outside diameter of the lower adjustable expansion cone is greater than the increased outside diameter of the upper adjustable expansion cone; and

wherein the reduced outside diameter of the lower adjustable expansion cone is less than or equal to the increased outside diameter of the upper adjustable expansion cone.

56. An apparatus for forming a wellbore casing in a borehole located in a subterranean formation including a preexisting wellbore casing, comprising:
- a support member defining a first fluid passage;
 - an expansion device coupled to the support member defining a second fluid passage fluidly coupled to the first fluid passage;
 - an expandable tubular liner movably coupled to the expansion device; and
 - an expandable shoe coupled to the expandable tubular liner;
- wherein the expansion device is adjustable to a plurality of stationary positions.
57. A method of forming a wellbore casing in a subterranean formation having a preexisting wellbore casing positioned in a borehole, comprising:
- installing a tubular liner, an adjustable expansion device, and a shoe in the borehole;
 - radially expanding at least a portion of the shoe by a process comprising:
 - adjusting the adjustable expansion device to a first outside diameter; and
 - injecting a fluidic material into the shoe; and
 - radially expanding at least a portion of the tubular liner by a process comprising:
 - adjusting the adjustable expansion device to a second outside diameter; and
 - injecting a fluidic material into the borehole below the adjustable expansion device.
58. A system for forming a wellbore casing in a subterranean formation having a preexisting wellbore casing positioned in a borehole, comprising:
- means for installing a tubular liner, an adjustable expansion device, and a shoe in the borehole;
 - means for radially expanding at least a portion of the shoe comprising:
 - means for adjusting the adjustable expansion device to a first outside diameter; and
 - means for injecting a fluidic material into the shoe; and
 - means for radially expanding at least a portion of the tubular liner comprising:
 - means for adjusting the adjustable expansion device to a second outside diameter; and
 - means for injecting a fluidic material into the borehole below the adjustable expansion device.

59. A wellbore casing positioned in a borehole within a subterranean formation, comprising:

a first wellbore casing comprising:

an upper portion of the first wellbore casing; and

a lower portion of the first wellbore casing coupled to the upper portion of the first wellbore casing;

wherein the inside diameter of the upper portion of the first wellbore casing is less than the inside diameter of the lower portion of the first wellbore casing; and

a second wellbore casing comprising:

an upper portion of the second wellbore casing that overlaps with and is coupled to the lower portion of the first wellbore casing; and

a lower portion of the second wellbore casing coupled to the upper portion of the second wellbore casing;

wherein the inside diameter of the upper portion of the second wellbore casing is less than the inside diameter of the lower portion of the second wellbore casing; and

wherein the inside diameter of the upper portion of the first wellbore casing is equal to the inside diameter of the upper portion of the second wellbore casing;

wherein the second wellbore casing is coupled to the first wellbore casing by the process of:

installing the second wellbore casing and an adjustable expansion device within the borehole;

radially expanding at least a portion of the lower portion of the second wellbore casing by a process comprising:

adjusting the adjustable expansion device to a first outside diameter; and

injecting a fluidic material into the second wellbore casing; and

radially expanding at least a portion of the upper portion of the second wellbore casing by a process comprising:

adjusting the adjustable expansion device to a second outside diameter; and

injecting a fluidic material into the borehole below the adjustable expansion device.

60. An apparatus for forming a wellbore casing in a borehole located in a subterranean formation including a preexisting wellbore casing, comprising:

- a support member including a first fluid passage;
- a first adjustable expansion device coupled to the support member including a second fluid passage fluidly coupled to the first fluid passage;
- a second adjustable expansion device coupled to the support member including a third fluid passage fluidly coupled to the first fluid passage;
- an expandable tubular liner movably coupled to the first and second adjustable expansion devices; and
- an expandable shoe coupled to the expandable tubular liner.

61. A method of forming a wellbore casing in a subterranean formation having a preexisting wellbore casing positioned in a borehole, comprising:

- installing a tubular liner, an upper adjustable expansion device, a lower adjustable expansion device, and a shoe in the borehole;
- radially expanding at least a portion of the shoe by a process comprising:
 - adjusting the lower adjustable expansion device to an increased outside diameter; and
 - injecting a fluidic material into the shoe; and
- radially expanding at least a portion of the tubular liner by a process comprising:
 - adjusting the lower adjustable expansion device to a reduced outside diameter;
 - adjusting the upper adjustable expansion device to an increased outside diameter; and
 - injecting a fluidic material into the borehole below the lower adjustable expansion device.

62. A system for forming a wellbore casing in a subterranean formation having a preexisting wellbore casing positioned in a borehole, comprising:

- means for installing a tubular liner, an upper adjustable expansion device, a lower adjustable expansion device, and a shoe in the borehole;
- means for radially expanding at least a portion of the shoe comprising:
 - means for adjusting the lower adjustable expansion device to an increased outside diameter; and

means for injecting a fluidic material into the shoe; and
means for radially expanding at least a portion of the tubular liner comprising:
means for adjusting the lower adjustable expansion device to a reduced
outside diameter;
means for adjusting the upper adjustable expansion device to an increased
outside diameter; and
means for injecting a fluidic material into the borehole below the lower
adjustable expansion device.

63. A wellbore casing positioned in a borehole within a subterranean formation,
comprising:

a first wellbore casing comprising:

an upper portion of the first wellbore casing; and

a lower portion of the first wellbore casing coupled to the upper portion of the first
wellbore casing;

wherein the inside diameter of the upper portion of the first wellbore casing is less
than the inside diameter of the lower portion of the first wellbore casing; and

a second wellbore casing comprising:

an upper portion of the second wellbore casing that overlaps with and is coupled to
the lower portion of the first wellbore casing; and

a lower portion of the second wellbore casing coupled to the upper portion of the
second wellbore casing;

wherein the inside diameter of the upper portion of the second wellbore casing is less
than the inside diameter of the lower portion of the second wellbore casing;
and

wherein the inside diameter of the upper portion of the first wellbore casing is equal
to the inside diameter of the upper portion of the second wellbore casing;

wherein the second wellbore casing is coupled to the first wellbore casing by the
process of:

installing the second wellbore casing, an upper adjustable expansion device,
a lower adjustable expansion device, and a shoe in the borehole;

radially expanding at least a portion of the lower portion of the second
wellbore casing shoe by a process comprising:

adjusting the lower adjustable expansion device to an increased outside diameter; and
injecting a fluidic material into the lower portion of the second wellbore casing; and
radially expanding at least a portion of the upper portion of the second wellbore casing by a process comprising:
adjusting the lower adjustable expansion device to a reduced outside diameter;
adjusting the upper adjustable expansion device to an increased outside diameter; and
injecting a fluidic material into the borehole below the lower adjustable expansion device.

64. An apparatus for forming a wellbore casing in a borehole located in a subterranean formation including a preexisting wellbore casing, comprising:

a support member including a first fluid passage;
an expansion device coupled to the support member including a second fluid passage fluidly coupled to the first fluid passage;
an expandable tubular liner movably coupled to the expansion device; and
an expandable shoe coupled to the expandable tubular liner comprising:
a valveable fluid passage for controlling the flow of fluidic materials out of the expandable shoe;
an expandable portion comprising one or more inward folds; and
a remaining portion coupled to the expandable portion;
wherein the outer circumference of the expandable portion is greater than the outer circumference of the remaining portion;
wherein the expansion device is adjustable to a plurality of stationary positions.

65. A method of forming a wellbore casing in a subterranean formation having a preexisting wellbore casing positioned in a borehole, comprising:

installing a tubular liner, an adjustable expansion device, and a shoe in the borehole;
radially expanding at least a portion of the shoe by a process comprising:
lowering the adjustable expansion device into the shoe;
adjusting the adjustable expansion device to a first outside diameter;

pressurizing a region within the shoe below the adjustable expansion device using a fluidic material; and
pressurizing an annular region above the adjustable expansion device using the fluidic material; and
radially expanding at least a portion of the tubular liner by a process comprising:
adjusting the adjustable expansion device to a second outside diameter;
pressurizing a region within the shoe below the adjustable expansion device using a fluidic material; and
pressurizing an annular region above the adjustable expansion device using the fluidic material;
wherein the first outside diameter of the adjustable expansion device is greater than the second outside diameter of the adjustable expansion device.

66. A system for forming a wellbore casing in a subterranean formation having a preexisting wellbore casing positioned in a borehole, comprising:
- means for installing a tubular liner, an adjustable expansion device, and a shoe in the borehole;
 - means for radially expanding at least a portion of the shoe comprising:
 - means for lowering the adjustable expansion device into the shoe;
 - means for adjusting the adjustable expansion device to a first outside diameter;
 - means for pressurizing a region within the shoe below the adjustable expansion device using a fluidic material; and
 - means for pressurizing an annular region above the adjustable expansion device using the fluidic material; and
 - means for radially expanding at least a portion of the tubular liner comprising:
 - means for adjusting the adjustable expansion device to a second outside diameter;
 - means for pressurizing a region within the shoe below the adjustable expansion device using a fluidic material; and
 - means for pressurizing an annular region above the adjustable expansion device using the fluidic material;
- wherein the first outside diameter of the adjustable expansion device is greater than the second outside diameter of the adjustable expansion device.

67. A wellbore casing positioned in a borehole within a subterranean formation, comprising:

a first wellbore casing comprising:

an upper portion of the first wellbore casing; and

a lower portion of the first wellbore casing coupled to the upper portion of the first wellbore casing;

wherein the inside diameter of the upper portion of the first wellbore casing is less than the inside diameter of the lower portion of the first wellbore casing; and

a second wellbore casing comprising:

an upper portion of the second wellbore casing that overlaps with and is coupled to the lower portion of the first wellbore casing; and

a lower portion of the second wellbore casing coupled to the upper portion of the second wellbore casing;

wherein the inside diameter of the upper portion of the second wellbore casing is less than the inside diameter of the lower portion of the second wellbore casing;

and

wherein the inside diameter of the upper portion of the first wellbore casing is equal to the inside diameter of the upper portion of the second wellbore casing;

wherein the second wellbore casing is coupled to the first wellbore casing by the process of:

installing the second wellbore casing and an adjustable expansion device in the borehole;

radially expanding at least a portion of the lower portion of the second wellbore casing by a process comprising:

lowering the adjustable expansion device into the lower portion of the second wellbore casing;

adjusting the adjustable expansion device to a first outside diameter;

pressurizing a region within the lower portion of the second wellbore casing below the adjustable expansion device using a fluidic material; and

pressurizing an annular region above the adjustable expansion device using the fluidic material; and

radially expanding at least a portion of the upper portion of the second wellbore casing by a process comprising:

adjusting the adjustable expansion device to a second outside diameter;

pressurizing a region within the shoe below the adjustable expansion device using a fluidic material; and
pressurizing an annular region above the adjustable expansion device using the fluidic material;
wherein the first outside diameter of the adjustable expansion device is greater than the second outside diameter of the adjustable expansion device.

68. An apparatus for forming a wellbore casing in a borehole located in a subterranean formation including a preexisting wellbore casing, comprising:

- a support member including a first fluid passage;
- a first adjustable expansion device coupled to the support member including a second fluid passage fluidically coupled to the first fluid passage;
- a second adjustable expansion device coupled to the support member including a third fluid passage fluidically coupled to the first fluid passage;
- an expandable tubular liner movably coupled to the first and second adjustable expansion devices; and
- an expandable shoe coupled to the expandable tubular liner comprising:
 - a valveable fluid passage for controlling the flow of fluidic materials out of the expandable shoe;
 - an expandable portion comprising one or more inwards folds; and
 - a remaining portion coupled to the expandable portion;

wherein the outer circumference of the expandable portion is greater than the outer circumference of the remaining portion.

69. A method of forming a wellbore casing in a subterranean formation having a preexisting wellbore casing positioned in a borehole, comprising:

- installing a tubular liner, an upper adjustable expansion device, a lower adjustable expansion device, and a shoe in the borehole;
- radially expanding at least a portion of the shoe by a process comprising:
 - lowering the lower adjustable expansion device into the shoe;
 - adjusting the lower adjustable expansion device to an increased outside diameter;
- pressurizing a region within the shoe below the lower adjustable expansion device using a fluidic material; and

pressurizing an annular region above the upper adjustable expansion device using the fluidic material; and
radially expanding at least a portion of the tubular liner by a process comprising:
adjusting the lower adjustable expansion device to a reduced outside diameter;
adjusting the upper adjustable expansion device to an increased outside diameter;
pressurizing a region within the shoe below the lower adjustable expansion device using a fluidic material; and
pressurizing an annular region above the upper adjustable expansion device using the fluidic material;
wherein the increased outside diameter of the lower adjustable expansion device is greater than the increased outside diameter of the upper adjustable expansion device; and
wherein the reduced outside diameter of the lower adjustable expansion device is less than or equal to the increased outside diameter of the upper adjustable expansion device.

70. A system for forming a wellbore casing in a subterranean formation having a preexisting wellbore casing positioned in a borehole, comprising:
- means for installing a tubular liner, an upper adjustable expansion device, a lower adjustable expansion device, and a shoe in the borehole;
 - means for radially expanding at least a portion of the shoe comprising:
 - means for lowering the lower adjustable expansion device into the shoe;
 - means for adjusting the lower adjustable expansion device to an increased outside diameter;
 - means for pressurizing a region within the shoe below the lower adjustable expansion device using a fluidic material; and
 - means for pressurizing an annular region above the upper adjustable expansion device using the fluidic material; and
 - means for radially expanding at least a portion of the tubular liner comprising:
 - means for adjusting the lower adjustable expansion device to a reduced outside diameter;
 - means for adjusting the upper adjustable expansion device to an increased outside diameter;

means for pressurizing a region within the shoe below the lower adjustable expansion device using a fluidic material; and
means for pressurizing an annular region above the upper adjustable expansion device using the fluidic material;
wherein the increased outside diameter of the lower adjustable expansion device is greater than the increased outside diameter of the upper adjustable expansion device; and
wherein the reduced outside diameter of the lower adjustable expansion device is less than or equal to the increased outside diameter of the upper adjustable expansion device.

71. A wellbore casing positioned in a borehole within a subterranean formation, comprising:
- a first wellbore casing comprising
 - an upper portion of the first wellbore casing; and
 - a lower portion of the first wellbore casing coupled to the upper portion of the first wellbore casing;
 - wherein the inside diameter of the upper portion of the first wellbore casing is less than the inside diameter of the lower portion of the first wellbore casing; and
 - a second wellbore casing comprising:
 - an upper portion of the second wellbore casing that overlaps with and is coupled to the lower portion of the first wellbore casing; and
 - a lower portion of the second wellbore casing coupled to the upper portion of the second wellbore casing;
 - wherein the inside diameter of the upper portion of the second wellbore casing is less than the inside diameter of the lower portion of the second wellbore casing;
 - and
 - wherein the inside diameter of the upper portion of the first wellbore casing is equal to the inside diameter of the upper portion of the second wellbore casing;
 - wherein the second wellbore casing is coupled to the first wellbore casing by the process of:
 - installing the second wellbore casing, an upper adjustable expansion device, and a lower adjustable expansion device in the borehole;
 - radially expanding at least a portion of the shoe by a process comprising:

lowering the lower adjustable expansion device into the lower portion of the second wellbore casing;
adjusting the lower adjustable expansion device to an increased outside diameter;
pressurizing a region within the lower portion of the second wellbore casing below the lower adjustable expansion device using a fluidic material; and
pressurizing an annular region above the upper adjustable expansion device using the fluidic material; and
radially expanding at least a portion of the upper portion of the second wellbore casing by a process comprising:
adjusting the lower adjustable expansion device to a reduced outside diameter;
adjusting the upper adjustable expansion device to an increased outside diameter;
pressurizing a region within the lower portion of the second wellbore casing below the lower adjustable expansion device using a fluidic material; and
pressurizing an annular region above the upper adjustable expansion device using the fluidic material;
wherein the increased outside diameter of the lower adjustable expansion device is greater than the increased outside diameter of the upper adjustable expansion device; and
wherein the reduced outside diameter of the lower adjustable expansion device is less than or equal to the increased outside diameter of the upper adjustable expansion device.

72. An apparatus for radially expanding and plastically deforming a tubular member, comprising:
means for injecting fluidic materials into the tubular member to radially expand and plastically deform the tubular member; and
means for radially expanding and plastically deforming the tubular member by displacing an expansion device within the tubular member.
73. A method of forming a wellbore casing in a subterranean formation having a preexisting wellbore casing positioned in a borehole, comprising:
installing a tubular liner, an adjustable expansion device, and a shoe in the borehole;
radially expanding at least a portion of the shoe by a process comprising:
adjusting the adjustable expansion device to a first outside diameter; and

injecting a fluidic material into the shoe; and
radially expanding at least a portion of the tubular liner by a process comprising:
adjusting the adjustable expansion device to a second outside diameter; and
displacing the adjustable expansion device relative to the tubular liner.

74. A system for forming a wellbore casing in a subterranean formation having a preexisting wellbore casing positioned in a borehole, comprising:
- means for installing a tubular liner, an adjustable expansion device, and a shoe in the borehole;
 - means for radially expanding at least a portion of the shoe comprising:
 - means for adjusting the adjustable expansion device to a first outside diameter; and
 - means for injecting a fluidic material into the shoe; and
 - means for radially expanding at least a portion of the tubular liner comprising:
 - means for adjusting the adjustable expansion device to a second outside diameter; and
 - means for displacing the adjustable expansion device relative to the tubular liner.

75. A wellbore casing positioned in a borehole within a subterranean formation, comprising:
- a first wellbore casing comprising:
 - an upper portion of the first wellbore casing; and
 - a lower portion of the first wellbore casing coupled to the upper portion of the first wellbore casing;
 - wherein the inside diameter of the upper portion of the first wellbore casing is less than the inside diameter of the lower portion of the first wellbore casing; and
 - a second wellbore casing comprising:
 - an upper portion of the second wellbore casing that overlaps with and is coupled to the lower portion of the first wellbore casing; and
 - a lower portion of the second wellbore casing coupled to the upper portion of the second wellbore casing;

wherein the inside diameter of the upper portion of the second wellbore casing is less than the inside diameter of the lower portion of the second wellbore casing;
and
wherein the inside diameter of the upper portion of the first wellbore casing is equal to the inside diameter of the upper portion of the second wellbore casing;
wherein the second wellbore casing is coupled to the first wellbore casing by the process of:
installing the second wellbore casing and an adjustable expansion device within the borehole;
radially expanding at least a portion of the lower portion of the second wellbore casing by a process comprising:
adjusting the adjustable expansion device to a first outside diameter;
and
injecting a fluidic material into the second wellbore casing; and
radially expanding at least a portion of the upper portion of the second wellbore casing by a process comprising:
adjusting the adjustable expansion device to a second outside diameter; and
displacing the adjustable expansion device relative to the tubular liner.

76. A method of forming a wellbore casing in a subterranean formation having a preexisting wellbore casing positioned in a borehole, comprising:
installing a tubular liner, an upper adjustable expansion device, a lower adjustable expansion device, and a shoe in the borehole;
radially expanding at least a portion of the shoe by a process comprising:
adjusting the lower adjustable expansion device to an increased outside diameter; and
injecting a fluidic material into the shoe; and
radially expanding at least a portion of the tubular liner by a process comprising:
adjusting the lower adjustable expansion device to a reduced outside diameter;
adjusting the upper adjustable expansion device to an increased outside diameter; and
displacing the upper adjustable expansion device relative to the tubular liner.

77. A system for forming a wellbore casing in a subterranean formation having a preexisting wellbore casing positioned in a borehole, comprising:
- means for installing a tubular liner, an upper adjustable expansion device, a lower adjustable expansion device, and a shoe in the borehole;
 - means for radially expanding at least a portion of the shoe comprising:
 - means for adjusting the lower adjustable expansion device to an increased outside diameter; and
 - means for injecting a fluidic material into the shoe; and
 - means for radially expanding at least a portion of the tubular liner comprising:
 - means for adjusting the lower adjustable expansion device to a reduced outside diameter;
 - means for adjusting the upper adjustable expansion device to an increased outside diameter; and
 - means for displacing the upper adjustable expansion device relative to the tubular liner.
78. A wellbore casing positioned in a borehole within a subterranean formation, comprising:
- a first wellbore casing comprising:
 - an upper portion of the first wellbore casing; and
 - a lower portion of the first wellbore casing coupled to the upper portion of the first wellbore casing;
 - wherein the inside diameter of the upper portion of the first wellbore casing is less than the inside diameter of the lower portion of the first wellbore casing; and
 - a second wellbore casing comprising:
 - an upper portion of the second wellbore casing that overlaps with and is coupled to the lower portion of the first wellbore casing; and
 - a lower portion of the second wellbore casing coupled to the upper portion of the second wellbore casing;
 - wherein the inside diameter of the upper portion of the second wellbore casing is less than the inside diameter of the lower portion of the second wellbore casing; and

wherein the inside diameter of the upper portion of the first wellbore casing is equal to the inside diameter of the upper portion of the second wellbore casing; wherein the second wellbore casing is coupled to the first wellbore casing by the process of:

installing the second wellbore casing, an upper adjustable expansion device, a lower adjustable expansion device, and a shoe in the borehole;

radially expanding at least a portion of the lower portion of the second wellbore casing shoe by a process comprising:

adjusting the lower adjustable expansion device to an increased outside diameter; and

injecting a fluidic material into the lower portion of the second wellbore casing; and

radially expanding at least a portion of the upper portion of the second wellbore casing by a process comprising:

adjusting the lower adjustable expansion device to a reduced outside diameter;

adjusting the upper adjustable expansion device to an increased outside diameter; and

displacing the upper adjustable expansion device relative to the tubular liner;

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US03/00609

A. CLASSIFICATION OF SUBJECT MATTER												
IPC(7) : E21B 43/10												
US CL : 166/380, 207												
According to International Patent Classification (IPC) or to both national classification and IPC												
B. FIELDS SEARCHED												
Minimum documentation searched (classification system followed by classification symbols) U.S. : 166/380, 207, 212, 216, 217												
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched												
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)												
C. DOCUMENTS CONSIDERED TO BE RELEVANT												
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.										
A	US 2002/0033261 A1 (METCALFE) 21 March 2002 (21.03.02), summary:	1-55										
A	US 6,085,838 A (VERCAEMER et al.) 11 July 2000 (11.07.02), figures 5-7.	1-55										
<input type="checkbox"/> Further documents are listed in the continuation of Box C. <input type="checkbox"/> See patent family annex.												
Special categories of cited documents: <table border="0"> <tr> <td>"A" document defining the general state of the art which is not considered to be of particular relevance</td> <td>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</td> </tr> <tr> <td>"E" earlier application or patent published on or after the international filing date</td> <td>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</td> </tr> <tr> <td>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</td> <td>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</td> </tr> <tr> <td>"O" document referring to an oral disclosure, use, exhibition or other means</td> <td>"&" document member of the same patent family</td> </tr> <tr> <td>"P" document published prior to the international filing date but later than the priority date claimed</td> <td></td> </tr> </table>			"A" document defining the general state of the art which is not considered to be of particular relevance	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention	"E" earlier application or patent published on or after the international filing date	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone	"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art	"O" document referring to an oral disclosure, use, exhibition or other means	"&" document member of the same patent family	"P" document published prior to the international filing date but later than the priority date claimed	
"A" document defining the general state of the art which is not considered to be of particular relevance	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention											
"E" earlier application or patent published on or after the international filing date	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone											
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art											
"O" document referring to an oral disclosure, use, exhibition or other means	"&" document member of the same patent family											
"P" document published prior to the international filing date but later than the priority date claimed												
Date of the actual completion of the international search 15 April 2003 (15.04.2003)		Date of mailing of the international search report 20 MAY 2003										
Name and mailing address of the ISA/US Commissioner of Patents and Trademarks Box PCT Washington, D.C. 20231 Facsimile No. (703)305-3230		Authorized Officer David Bagnell Telephone No. (703) 308-1113										

Form PCT/ISA/210 (second sheet) (July 1998)

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☒ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.